





FLAIL CHOPPER WITH RAKE TINES


The series KD flail choppers are especially designed for chopping prunings in vineyards and berries.

For a better pick-up and pulverization of thin prunings or prunings that are laying flat they are delivered as standard with rake tines which are adjustable in height.



KD SERIES

Flail choppers for vineyards

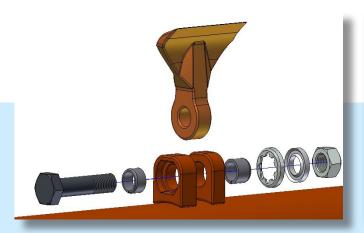

Special 0.9 kg flails guarantee excellent shredding of prunings up to 3 cm diameter. They are fitted to the two times electronically balanced flail rotor with heavy bolts and interchangeable bushes.



Shred material is thrown and spread over the rear roller. The roller bearings are fitted to the exterior for quick and easy maintenance. Covers limit the penetration of dirt and moisture, which significantly increases the lifespan of the bearings.

OFFSET FEATURE

The standard configuration includes the possibility of mounting the machine centrally or offset by means of moving the headstock. Hydraulic offset is optionally available.

EXTRA'S

- Headstock for front mount
- Hydraulic offset feature
- Pro-fix protection against stones

| TECHNICAL SPECIFICATIONS | KD-150 | KD-180 | KD-210 | KD-240 |
|--|-------------|-------------|-------------|-------------|
| Working width (cm/inch) | 150 / 4'11" | 180 / 5'11" | 210 / 6'11" | 240 / 7'11" |
| PTO speed (rpm) | 540 | 540 | 540 | 540 |
| Flail rotor speed (rpm) | 2100 | 2100 | 2100 | 2100 |
| Min. power required (kW/HP) | 18 / 25 | 21 / 28 | 25 / 34 | 30 / 41 |
| Flails 0,9 kg (1¾ lbs) | 16 | 18 | 22 | 24 |
| Total width (cm/inch) | 172 / 5'8" | 202 / 6'8" | 232 / 7'8" | 262 / 8'8" |
| Tractor coupling system (Cat.) | + | + | + | + |
| Max. offset from centre of tractor (cm/inch) | 80 / 2'7" | 127 / 4'2" | 142 / 4'2" | 160 / 5'3" |
| Number of rake tines | 11 | 14 | 16 | 18 |
| Weight (kg/lbs) | 460 / 1014 | 500 / 1102 | 590 / 1301 | 685 / 1510 |

As our policy is one of continuous improvement, we reserve the right to change the specification or to modifiy the desing without prior notice