



Symbol of Perfection



- 3 completely newly developed flail mowers
- Total working width of 9.2 meters
- Generous overlap
- Fitting without conversion

The TRIGANT was developed in cooperation with the Maschinenfabrik Bernard Krone GmbH and enables you to use the BIG M 450 not only for mowing grass, but also for mulching maize stubble or other heavier products.

For many years, PERFECT has been a well-known brand of rotary and flail mulchers and nowadays delivers high-quality Beneden-Leeuwen machines all over the world.

Maximum productivity and fuel efficiency. Lower fuel consumption / CO2 emissions. Productivity and cost per hectare compared to a triple mower mounted on a tractor.



-16%



+40%



-20%

TRIGANT FLAIL MOWERS FOR KRONE BIG M 450




Standard 2.2 kg heavy flails. Less sensitive to stones. Mounted with 20mm bolts and replaceable wear bushes in the mounting ears.



- The flail shafts are standard equipped with 2.2 kg heavy flails, including two counter knives
- The flail rotors are balanced twice, to assure a vibration free run at 1900 rpm
- Flail shafts and rollers are connected to the automatic lubrication system of the KRONE BIG M 450
- Mechanical cutting height adjustment
- Hydraulical groundpressure control from the drivers cabin
- Direkt drive by means of PTO shaft and 4 V-belts

The self-cleaning roller positioned over the entire width ensures optimum ground adaptation and prevents unnecessary ground contact and wear of the flails. On request, the TRIGANT can also be equipped with 2.7 kg Combi-Flails.

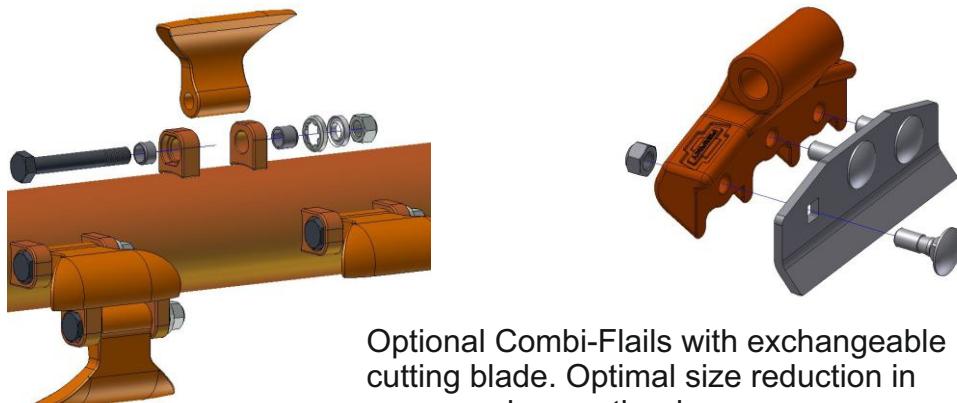

Optional Combi-Flails with exchangeable cutting blade. Optimal size reduction in grass, maize or other heavy crops.



Technical specifications	Trigant
Total cutting width	cm 920
Cutting width side mowers	cm 320
Cutting width front mower	cm 349
Transport width	cm 330
No. of flails	60
Mowing height	cm 4-10
V-belts per mower	4
Rotor speed	rpmn 1900
Diameter flail rotors	mm 273
Diamter rear rollers	mm 219

VAN WAMEL B.V.



Energieweg 1
6658 ZG Beneden-Leeuwen
HOLLAND
Tel. + 31 (0)487-592944
Fax. +31 (0)487-592970
Email:perfect@vanwamel.nl



Information and illustrations are not binding. Changes reserved.